


DU25

1/4 HP Stainless Steel Utility Pump

SPECIFICATIONS

Applications	Dewatering	
Capacities	19 GPM	71.9 LPM
Shut-off Head	23'	7 m
Operations	manual	
Pump-down Range	3/8"	9.5 mm
Solids Handling	1/8"	3.2 mm
Liquids Handling	clear water	
Continuous Liquid Temp.	77°F	22°C
Motor	1/4 HP, PSC	
Electrical Data	115V, 60Hz, 2.5A, 3450 RPM	
Acceptable pH Range	5-9	
Mechanical Seal	dual lip seal with ceramic shaft sleeve	
Housing	stainless steel	
Impeller	polyphenylene oxide	
Power Cord	15' three-prong, SJTW 18-3	
Discharge, NPT	1-1/4"	
Dimensions	9"H x 7"W	

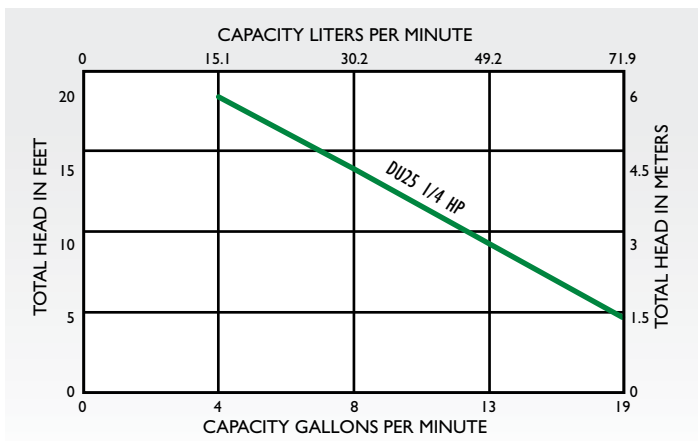

FEATURES

- Pumps up to 19 GPM
- Extra durable for heavy-duty use
- Used for dewatering shallow flooded areas such as basements, window wells, rooftops, ponds and stock tanks
- 1-1/4" NPT discharge
- 15' three-prong power cord
- Includes 1" x 3/4" garden hose adapter
- Pumps standing water down to 1/8"
- 1-1/4" NPT x 1" NPT adapter
- Rated for continuous duty